


# Lift Roller Sizer



**Sizing Equipment** 

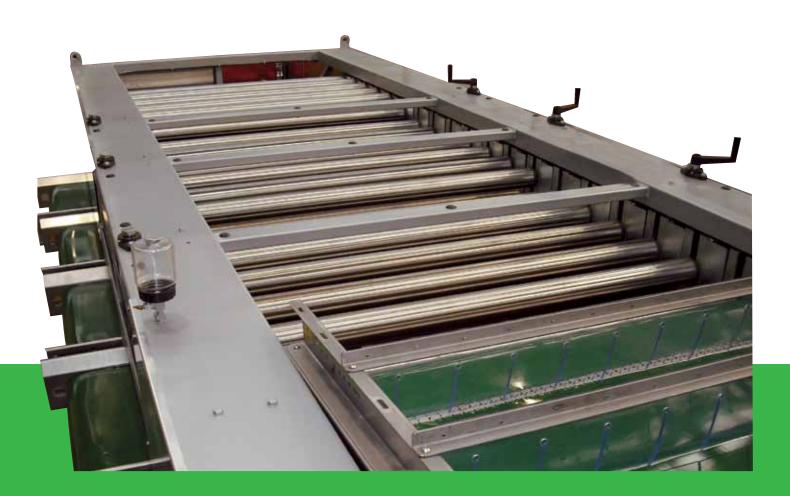

- · Multiple models available with:
  - Widths of 1200 mm (4'), 1500 mm (5') and 1750 mm (5'9") • Built strongly to
  - Larger custom widths also available on application
  - 3 to 7 drops
  - 6" or 8" chain pitch
  - Capacities up to 60 t/hr (132,000 lb)
- · Choice of round polished stainless steel or scalloped plastic rollers designed to run wet/dry and or dirty\*
- · Can size long produce from 10 to 89 mm<sup>+</sup> or round produce from 18 to 127 mm+ Custom ranges also available on request
- · Customisable outfeed cross conveyor length
- · Reversible and easily adjustable out-feed cross conveyors
- · Custom frame height available
- \* Dry and clean produce should be used with scalloped rollers
- \*\*Options
- + Diameter of produce

### **Equipment Description**

The Wyma Lift Roller Sizer separates your produce into multiple sizes. It is one of the most accurate sizers on the market.

As the rollers move forward every second roller lifts, increasing the gap between it and every other roller (which does not lift). As the gaps increase, your produce gently drops through onto a series of reversible cross conveyors, which moves produce to the next stage in the processing line. The rollers are mounted on an endless chain travelling at a speed suitable to meet required throughput and allow sufficient time for produce to turn and be accurately sized.

The Lift Roller Sizer is simple to operate, is virtually maintenance free and can be integrated easily into any existing processing line. It can size potatoes, carrots, onions, and other round or long produce.



· Heavy duty conveyor

chain and sprocket

and durability

stand the test of

time and provide

a low total cost or

ownership over its

lifetime

are used for strength

- Accurate diameter sizing
- · Gentle to prevent produce damage
- · In-feed even flow conveyor to minimise product fall on entry to the rollers and evenly distribute produce across the width to optimise capacity\*\*
- · All cross conveyors are "soft" where the product lands and have minimal falls from the rollers to prevent produce damage

- · Rollers run on rubber strips to reduce vibration and noise
- · Automatic cleaning system for round stainless steel rollers\*\*
- · Platform ladders and safety rails can be easily added to improve access for inspection during operation\*\*
- · Variable speed control to adjust roller speed to suit conditions volume, and type\*\*




- ergonomic manual handle or automatic system\*\* during operation
- · Centralised lubrication system for chain and bearings
- · Out-feed conveyors placed on easy glide rollers to position out-feed point as required
- · Comprehensive worldwide spare parts, service and installation support network







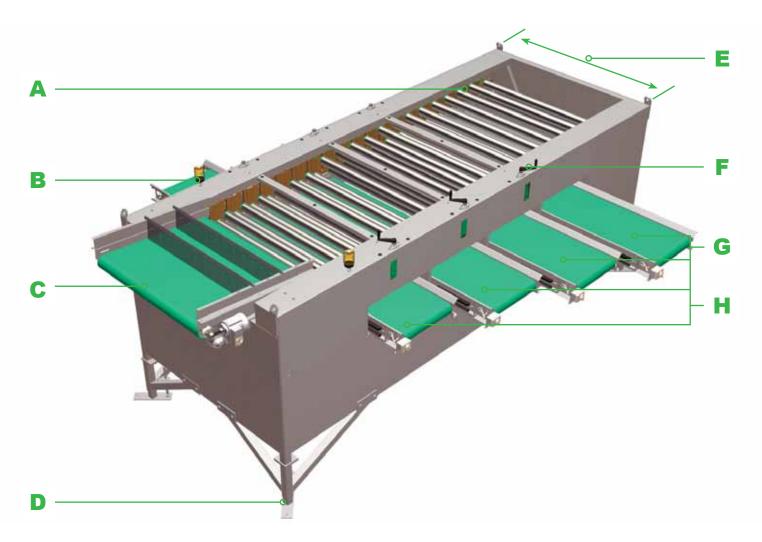

- Α Round polished stainless steel rollers (Scalloped plastic rollers are also an option)
- В Centralised lubrication system for chain and bearings
- С In-feed even flow conveyor
- D Adjustable leg frame height
- Е Widths of 1200, 1500 and 1750 mm or custom widths available
- F. Ergonomic manual handle for size adjustment
- G Reversible and adjustable out-feed cross conveyors on easy glide rollers
- Three to seven drops available Н

Range of material specifications available from mild steel, galvanised and painted to full stainless steel.

### **Technical Data:**

Model	Approx Capacity*	Length (Total)	Width (Total)	Conveyor Length/ Width	Mass (without out- feed conveyor)	Min/Max Diameter Size
GRxxx12	1 - 25 t/hr (up to 55,116 lb)	5,160 mm (16'9")	1,760 mm (5'8")	Custom length 600 mm (2'0")width	2.5 t (5,512 lb)	10 mm - 127 mm
GRxxx15	1 - 40 t/hr (up to 88,185 lb)	5,160 mm (16'9")	2,056 mm (6'7")	Custom length 600 mm (2'0")width	2.8 t (6,173 lb)	10 mm - 127 mm
GRxxx18	1 - 60 t/hr (up to 132,277 lb)	5,160 mm (16'9")	2,306 mm (7'6")	Custom length 600 mm (2'0")width	3.1 t (6,834 lb)	10 mm - 127 mm

Custom size range available on request \* Depending on soil, produce and operating conditions

### Wyma Fresh Thinking

When you've worked hard to cultivate a successful growing and packing business and you're aiming to deliver a quality product, you want the best post-harvest handling solutions available.

When you buy Wyma, you buy proven technical innovation and quality, backed up by a deep understanding of your processing needs. We hope you will be as proud to be a Wyma owner as we are to manufacture and support the equipment worldwide.

Our fresh thinking is always available to help you keep improving the way you process your vegetables. As we say, "if it's worth growing, it's worth handling with Wyma".

## Insist on authentic Wyma spare parts



Consult



Design



Manufacture



Install



Support

### **Contact Details**

New Zealand Head Office

27 Foremans Road PO Box 16-707 Hornby 8441 Christchurch New Zealand P: +64 3 344 6403 F: +64 3 344 6407 www.wymasolutions.com sales@wymasolutions.com European Office

Wyma Europe s.r.o. Netovicka 875 27444 Slany Czech Republic P: +420 312 312 733 F: +420 312 312 734 www.wymasolutions.com eu.sales@wymasolutions.com Australian Contact

580 Doyles Road PO Box 1158 Shepparton Victoria 3630 Australia P: +61 400 577 921 F: +61 3 5831 1038 www.wymasolutions.com au.sales@wymasolutions.com

### Your Local Wyma Representative:



3475 County Rd. 88, RR # 1 Bradford, ON Canada L3Z 2A4 Tel: 905.775.3839 Fax: 905.775.8769

www.weeningbrothers.com

The information contained in this document is based upon the latest information available at the time of publication. We make no guarantees or representations as to its accuracy. We are continually updating and improving our products and reserve the right to amend, discontinue or alter specifications and prices without prior notice. © Wyma

### www.wymasolutions.com